
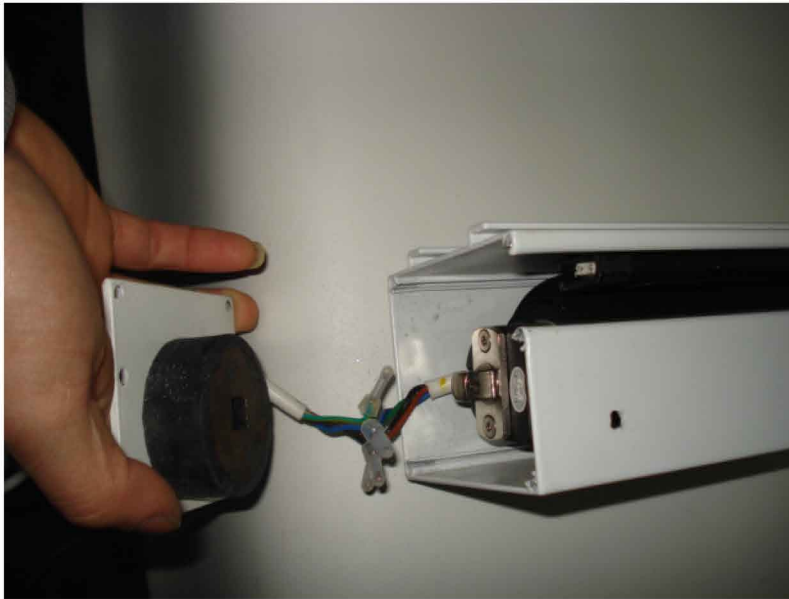


HOW TO CHANGE ELECTRICAL PROJECTION SCREEN MOTOR.

Motor overheat protection sensor


It should be noted that the drive motor has an overheat protection sensor. If the screen is consecutively raised and lowered within a 3-4 minute period, the motor will automatically shut-off to prevent the motor from overheating. If this happens, the user must allow 30 minutes cool-down time before resuming operation.

1. Loose the screw and pull the motor out slowly:


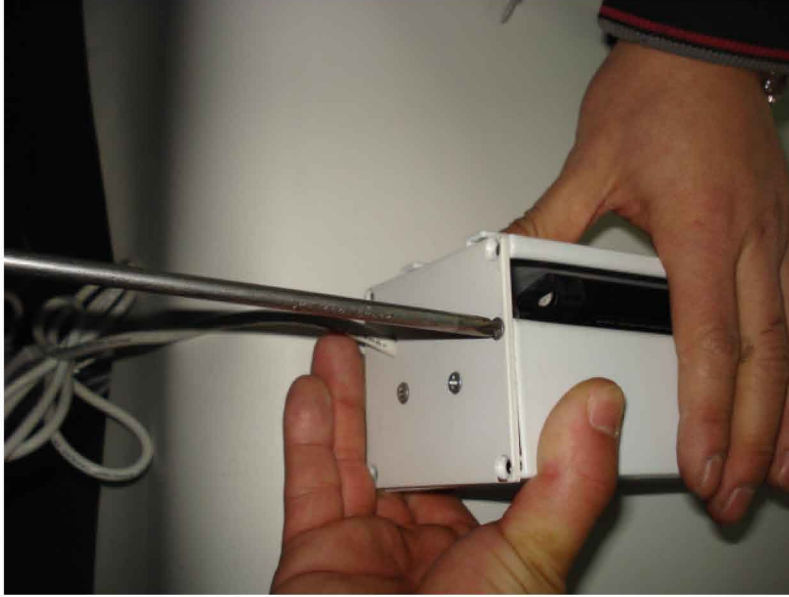


2. Connect case and motor through cables:

Pls note: Connect blue cable with blue cable, red cable with red cable, BROWN cable with BLACK cable.

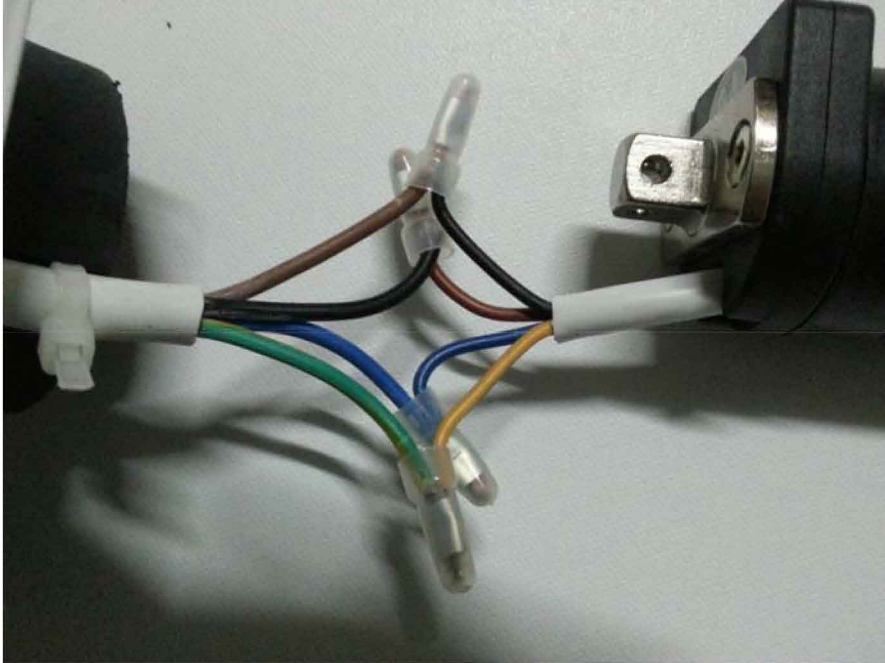

3. Push the motor back to the case lightly and slowly. Make the raised part on motor fit gap on case.

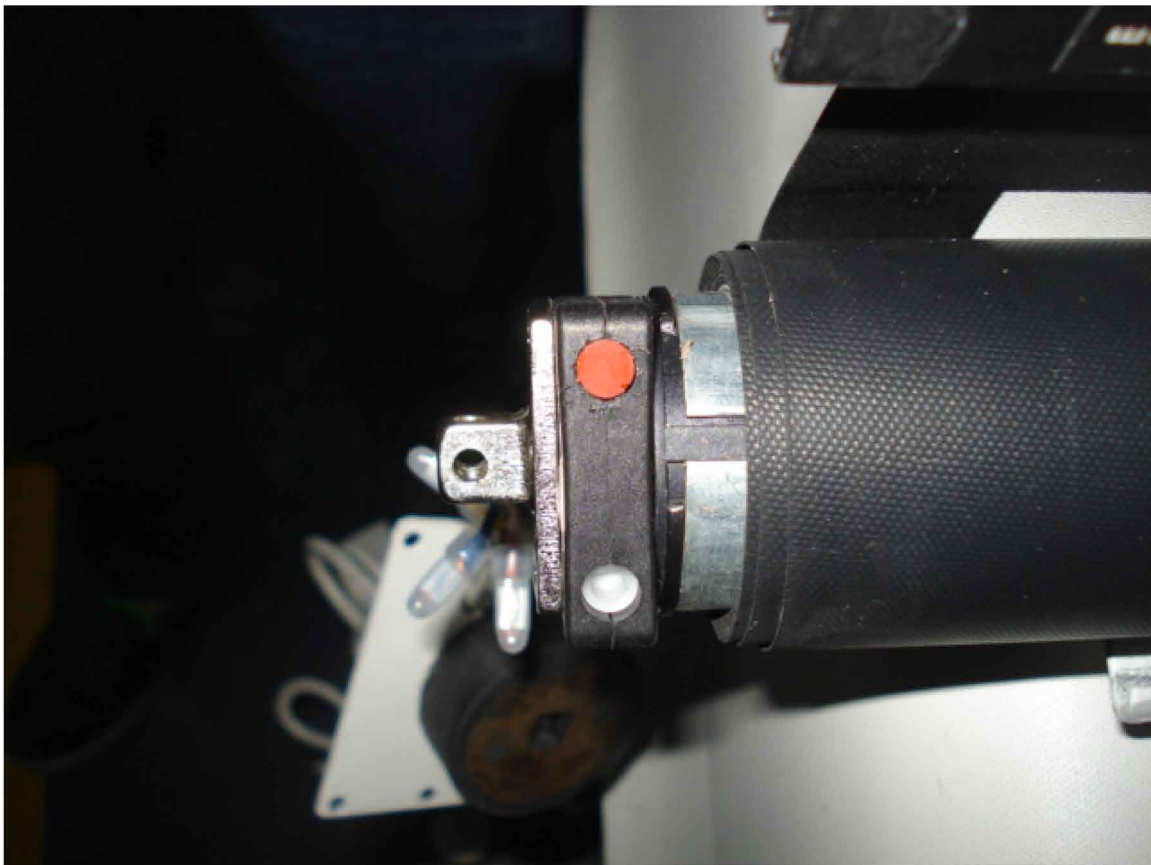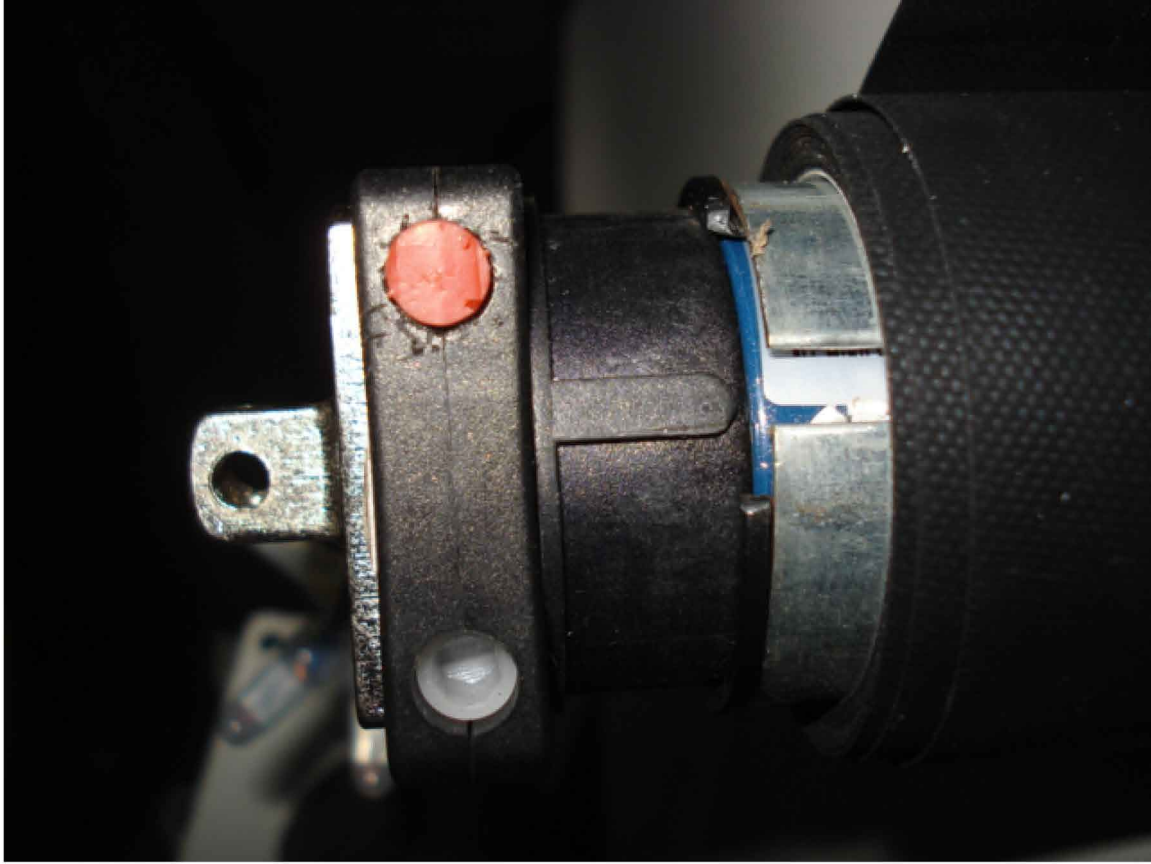

4. Tighten screws.

